




Features

- Size Range: 1/4" - 4" (DN08—DN100)
- Pressure Range: 2000 psig
- Upstream Vented Ball
- Cavity Free PTFE Seats
- 100% Helium Leak Tested
- Locking Lever Handle
- API607 4th Approved
- Optional Air Actuator, Limit Switch, Solenoid Assist Valves

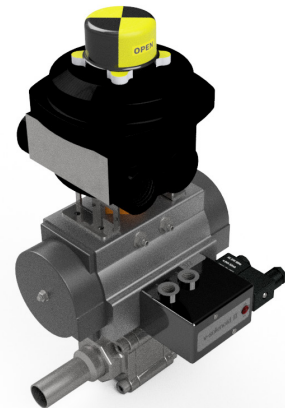


Fire Rated Ball Valves

Evans Components, Inc. was the first to introduce a High Purity Valve for use in the Semiconductor marketplace. Today we are a market leader in providing innovative fluid handling solutions, serving the Semiconductor, Lithium Battery, Bio-Pharm, Solar and Flat Panel markets. ECI currently offers 1/4" - 4" API 607 approved fire rated 3-pc ball valves, all FR Series valves come standard with upstream vented ball, cavity free RTFE seats and ISO 5211 actuator mounting pad, purge ports are optional.

Specifications


Size Range	1/4" - 4" (DN08–DN100)
Service Application	Electrolyte, NMP, Gas, Thermal Fluids, Chemicals, etc.
Pressure Rating	2000 PSI (138 Bar)
Materials	316 Stainless Steel
Certifications	ISO 9001, PED 97/23/EC
End Connection	Pipe Socket, Pipe Extension, Tube Extension, ANSI Flange
Special Features	Vented upstream ball, PTFE Cavity Free Seats
Temperature Rating	-20F (-29C) to 356F (180C)

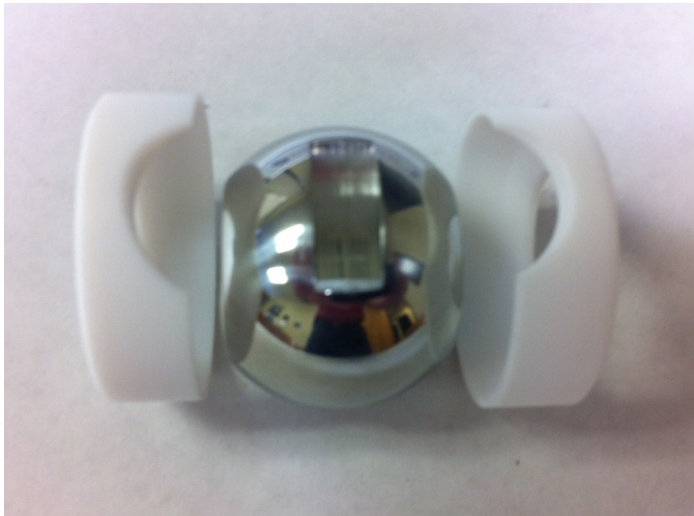



PTFE Cavity Free Seats (standard)

PERFORMANCE SPECIFICATIONS			
2000psi			
Test Pressure	Shell Test	20.7	Mpa
	Back Seal Test		
	Seal Test	15.2	
	Air Test	0.6	
Suitable Temp.	minus 29°C to 180°C		
Suitable Media	WATER / OIL / GAS		


PTFE P-T RATINGS

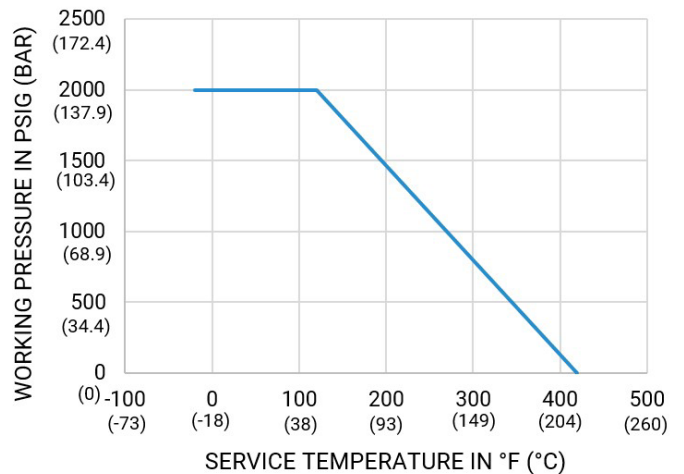

Bill Of Materials

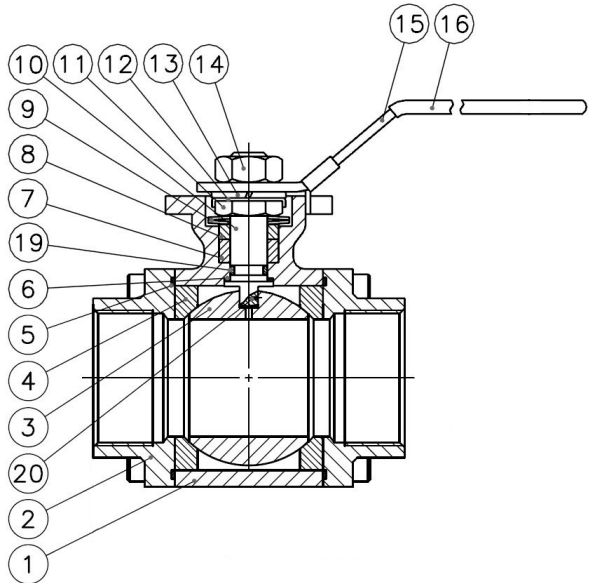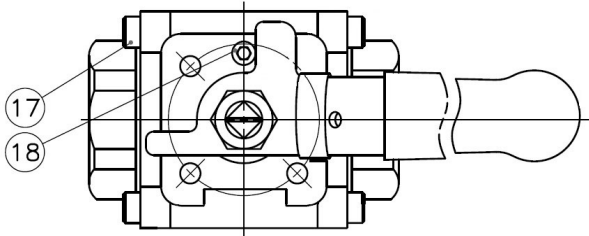


MATERIAL LIST			
ITEM	DESCRIPTION	MATERIAL	QTY
1	BODY	ASTM A351 CF8M	1
2	BODY CAP	ASTM A351 CF8M	2
3	BALL	ASTM A351 CF8M/316	1
4	SEAT	PTFE	2
5-1	BODY GASKET	GRAPHITE	1
5-2	BODY GASKET	PTFE	1
6-1	THRUST WASHER	GRAPHITE	1
6-2	THRUST WASHER	PTFE	1
7	STEM PACKING	GRAPHITE	1
8	GLAND	AISI 304	1
9	BELLEVILLE WASHER	AISI 301	2
10	STEM	ASTM A276 316	1
11	GLAND NUT	AISI 304	1
12	SPRING WASHER	AISI 304	1
13	HANDLE NUT	AISI 304	1
14	BODY BOLT	ASTM A193 B8	8-12
15	HANDLE	AISI 304	1
16	SLEEVE	VINYL PLASTISOL	1
17	LOCK SLIP	AISI 304	1
18	STEM O-RING	EPDM	1
19	STOP PING	AISI 304	1
20	ANTI-STATIC DEVISE	AISI 304	1

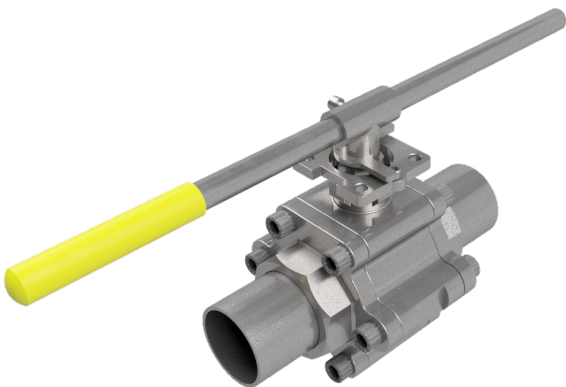


T-Bar Style Handle

(standard on 1.5" valves and above.)

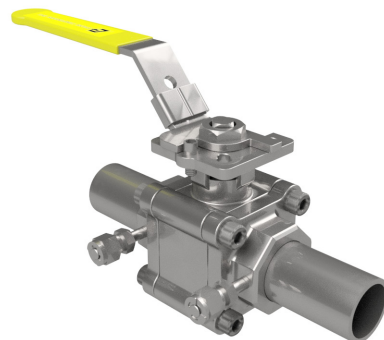

Optional Capped Compression Purge Ports


Dimensions

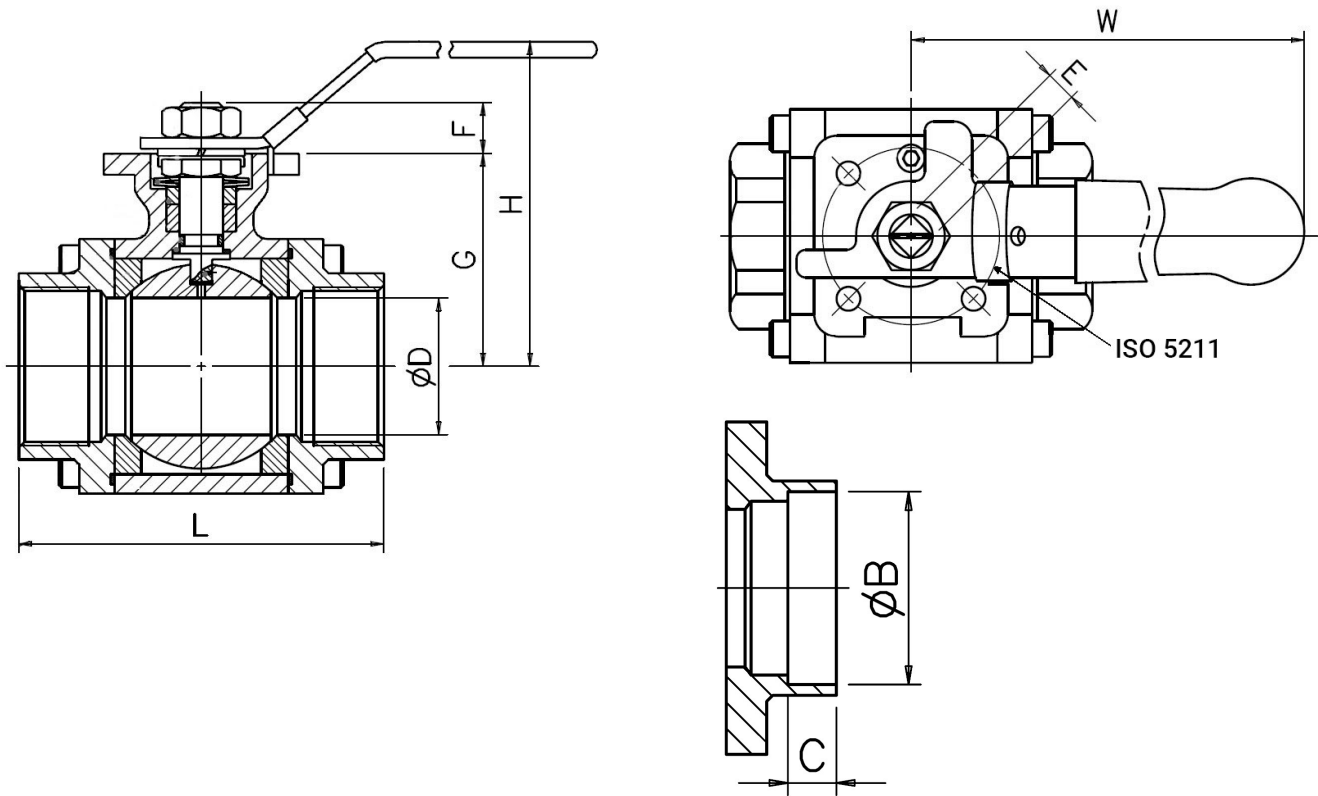

SIZE		$\varnothing D$	L	E	F	G	H	W	$\varnothing B$	C	ISO 5211	WEIGHT
IN	DN	IN / mm	IN / mm	IN / mm	IN / mm	IN / mm	IN / mm	IN / mm	IN / mm	IN / mm		LB / KG
1/4"	8	0.43 11	2.55 65	0.35 9	0.31 8	1.47 37.5	2.75 70	5.51 140	0.56 14.2	0.39 10	F04	2.4 1.1
3/8"	10	0.43 11	2.55 65	0.35 9	0.31 8	1.47 37.5	2.75 70	5.51 140	0.69 17.6	0.39 10	F04	2.4 1.1
1/2"	15	0.55 14	2.95 75	0.35 9	0.31 8	1.47 37.5	2.75 70	5.51 140	0.86 21.8	0.51 13	F04	2.4 1.1
3/4"	20	0.80 21	3.14 80	0.43 11	0.43 11	1.96 52.0	3.54 90	7.08 180	1.07 27.2	0.59 15	F04-F05	3.5 1.6
1.0"	25	0.98 25	3.54 90	0.43 11	0.43 11	2.36 60.0	3.93 100	7.08 180	1.33 33.9	0.59 15	F04-F05	4.9 2.2
1.5"	40	1.45 37	4.72 120	0.55 14	0.67 17	2.99 76.0	4.52 115	8.46 215	1.92 48.8	0.63 16	F07	10.1 4.6
2.0"	50	1.96 50	5.51 140	0.55 14	0.67 17	3.66 93.0	5.23 133	8.46 215	2.41 61.2	0.67 17	F07	16.1 7.3
2.5"	65	2.56 65	7.28 185	0.87 22	0.94 24	4.59 116.5	6.81 173	18.11 460	2.91 73.9	0.67 17	F07-F10	29.5 13.4
3.0"	80	3.15 80	8.07 205	0.87 22	0.94 24	5.00 127.0	7.24 184	18.11 460	3.54 89.8	0.67 17	F07-F10	46.3 21.0


EVANS FR SERIES

Tube Ends




PART NUMBER	SIZE	Ø A	L	L2
	IN / mm	IN / mm	IN / mm	IN / mm
FR-04-04STRM-XX	1/4" 6.4	0.25 6.4	4.05 102.9	2.03 51.5
FR-06-06STRM-XX	3/8" 9.5	0.375 9.5	4.61 117.0	2.31 58.5
FR-08-08STRM-XX	1/2" 9.5	0.50 12.7	8.27 210.0	4.14 105.0
FR-12-12STRM-XX	3/4" 19.1	0.75 19.1	8.27 210.0	4.14 105.0
FR-16-16STRM-XX	1.0" 25.4	1.00 25.4	8.73 221.8	4.37 110.9
FR-24-24STRM-XX	1.5" 38.1	1.50 38.1	9.86 250.6	4.93 125.3
FR-32-32STRM-XX	2.0" 50.8	2.00 50.8	10.54 267.8	5.27 133.9
FR-48-48STRM-XX	3.0" 76.2	3.00 76.2	10.24 336.3	6.62 168.1

Pipe Ends




PART NUMBER	SIZE	Ø A	L	L2
	IN / mm	IN / mm	IN / mm	IN / mm
FR-04-04STRL-XX	1/4" 6.4	0.54 13.7	6.56 166.6	3.28 83.3
FR-06-06STRL-XX	3/8" 9.5	0.675 17.1	6.56 166.6	3.28 83.3
FR-08-08STRL-XX	1/2" 9.5	0.84 21.3	6.95 176.5	3.48 88.3
FR-12-12STRL-XX	3/4" 19.1	1.05 26.7	7.15 181.6	3.58 90.8
FR-16-16STRL-XX	1.0" 25.4	1.315 33.4	7.57 192.4	3.79 96.2
FR-24-24STRL-XX	1.5" 38.1	1.90 48.3	8.72 221.6	4.36 110.8
FR-32-32STRL-XX	2.0" 50.8	2.375 60.3	9.50 241.3	4.75 120.7
FR-48-48STRL-XX	3.0" 76.2	3.50 88.9	12.08 306.9	6.04 153.5

Compression Ends



PART NUMBER	SIZE	Ø A	L	L2
	IN / mm	IN / mm	IN / mm	IN / mm
FR-04-04STRC-XX	1/4" 6.4	0.25 6.4	4.68 118.7	2.34 59.4
FR-06-06STRC-XX	3/8" 9.5	0.375 9.5	4.82 122.3	2.41 61.2
FR-08-08STRC-XX	1/2" 9.5	0.5 12.7	5.67 143.9	2.84 72.0
FR-12-12STRC-XX	3/4" 19.1	0.75 19.1	5.74 145.7	2.87 72.9
FR-16-16STRC-XX	1.0" 25.4	1.00 25.4	7.06 179.4	3.53 89.7
FR-24-24STRC-XX	1.5" 38.1	1.50 38.1	C/F	C/F
FR-32-32STRC-XX	2.0" 50.8	2.00 50.8	C/F	C/F

150 # ANSI Flange



PART NUMBER	SIZE	L	L2
	IN / mm	IN / mm	IN / mm
FR-08-08STRU-XX	1/2" 9.5	6.43 163.3	3.22 81.7
FR-12-12STRU-XX	3/4" 19.1	6.47 164.3	3.24 82.2
FR-16-16STRU-XX	1.0" 25.4	6.91 175.6	3.46 87.8
FR-24-24STRU-XX	1.5" 38.1	7.96 202.3	3.98 101.2
FR-32-32STRU-XX	2.0" 50.8	10.00 254.0	5.00 127.0
FR-48-48STRU-XX	3.0" 76.2	C/F	C/F

Part Number Matrix



EXAMPLE: FR - 08 - 08 STR M - XP - **
 1 - 2 - 3 4 5 - 6 - 7

Above part number describes a 1/2" stainless steel FR Series valve with 316SS tube extensions and a single downstream compression purge port.

1. Series (Material) Designator

FR - 316 Stainless Steel 1/4" - 4" (DN08–DN100)

2. Valve Size - IN.

04 - 1/4"	32 - 2"
06 - 3/8"	40 - 2-1/2"
08 - 1/2"	48 - 3"
10 - 5/8"	64 - 4"
12 - 3/4"	
16 - 1"	
24 - 1-1/2"	

3. End Connection Size Designator - IN.

04 - 1/4"	32 - 2"
06 - 3/8"	40 - 2-1/2"
08 - 1/2"	48 - 3"
10 - 5/8"	64 - 4"
12 - 3/4"	
16 - 1"	
24 - 1-1/2"	

4. Valve Assembly Pattern Designator

STR - Straight 2-way

5. Connection Type Designator

C - SS Compression Fitting
 F - Female NPT
 L - 316L SS Sch. 10 Pipe Extension
 M - 316L SS Tube Extension
 U - 150# ANSI Pipe Flange
 E - Pipe Socket

6. Purge Port Designator (Upstream/Downstream)

(1/4" purge port: 1/4" - 2";
 1/2" purge port: 3" and up)

X - No Purge Port
 P - Capped Compression
 V - Purge Valve w/ Capped Compression

7. **Options

NO - Normally Open Actuator - Spring Return
 NC - Normally Closed Actuator - Spring Return
 DA - Double Acting Actuator
 24V - 24V Solenoid
 120V - 120V Solenoid
 230V - 230V Solenoid
 LS - Limit Switch
 EX - Explosion Proof Option

EX Limit Switch

Features/Specifications



- Explosion proof ATEX / IECEx / KC Ex d IIC
- Rugged aluminum die-cast housing
- Standard beacon, Open/Close indication
- NAMUR mounting shaft for pneumatic air operator
- Aluminum/powder-coated housing
- Operating temperature: -40F – 212F (-40C – 100C)

EX Solenoid Valve

Features/Specifications

- Explosion proof ATEX, IP65, PTB
- Multi-million cycle life reliability. The innovative patented design and all composite construction means the V-Solenoid II is not affected by wear or corrosion.
- High airflow: Cv≥1.1
- NAMUR direct mounting, conforms to VDI/VDE 3845 standard
- Manual override standard
- Operating temperature: -4F – 140F (-20C – 60C)
- Operating pressure: 35 – 120 psi (2.4 - 8.3 bar)
- Voltage: 24VDC, 120VAC, 230VAC
- Valve body: Reinforced polyamide (PA)
- Port: 1/4" NPT

Air Actuator Specifications

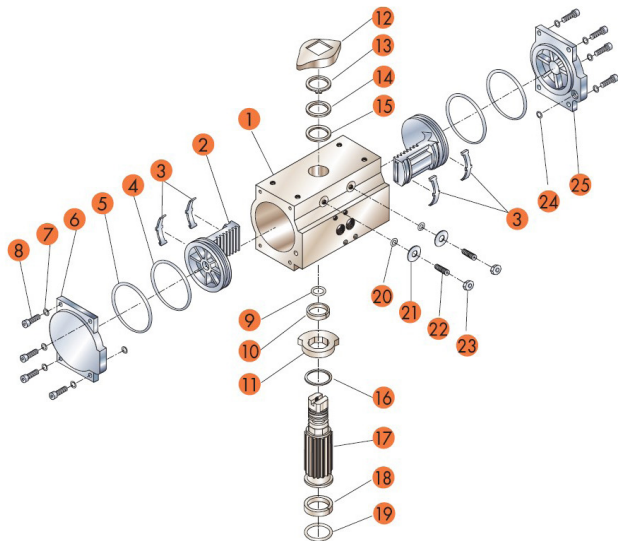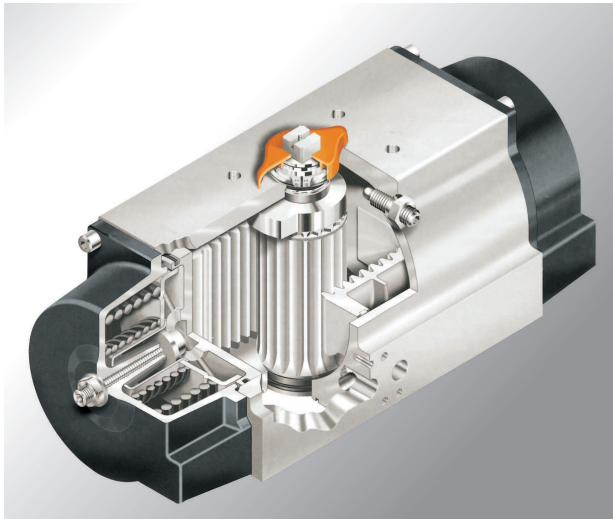

MATERIAL LIST	
NO.	MATERIAL
1	BODY: Extruded aluminum alloy (Hard anodized)
2	PISTONS: Die cast aluminum alloy
3	BEARING: Nylon
4	O-RING: Buna-N
5	O-RING: Buna-N
6	END CAP(L): Die cast aluminum alloy
7	WASHER: Stainless steel
8	CAP SCREW: Stainless steel
9	O-RING: Buna-N
10	BEARING: Nylon
11	STOP CAM: Sinteral steel
12	PISTON INDICATOR: Polyethylene
13	RETAINING RING: Stainless steel
14	WASHER: Stainless steel
15	BEARING: Nylon
16	RETAINING RING: Stainless steel
17	PINION: Carbon steel (Electro-less nickel plated)
18	BEARING: Nylon
19	O-RING: Buna-N
20	O-RING: Buna-N
21	WASHER: Stainless steel
22	NUT: Stainless steel
23	NUT: Stainless steel
24	O-RING: Buna-N
25	END CAP(R): Die cast aluminum alloy

Air Operated Actuator Performance

Operating Pressure Range: 40 to 120PSIG.

Maximum Allowable Working Pressure: 150PSIG.

Maximum Operating Pressure: 120PSIG

Operating Temperature Standard: -40°F to +200°F

*Air Inlet/Outlet connections: 1/4 BSP

Learn more about related Evans Products

EVANS COMPONENTS | Evans PLT Series Presslok® Stainless Tube Fittings/Valves
Tube Size Range: 1/2" thru 4"



PRESSLOK® GO/NO-GO GAUGES

If Presslok® Go/No-Go Gauge slips over-pressed section of fitting, press is acceptable. If gauge does not slip over pressed section, press is unacceptable.



EVANS COMPONENTS | Evans Ball Valves
High Purity 304/316 Stainless



BA-SG Series

- 1/4" - 24" and (1SA-489A) Sizes
- CFOS Cleaned and Bagged
- Integrated Valve Assemblies
- Standard Spool Assemblies & Custom Spool Lengths (Customer Specified In Feet)
- 100% Helium Leak Tested



EVANS COMPONENTS | Evans SG-30 Series
3 pc 304L Mini ball Valves



Features

- CFOS Cleaned
- Helium leak rated to 1 X 10⁻⁷ ssc/sec
- Economical one piece hex body design
- Compact, comes standard with butterfly handle
- Locking lever handle, optional
- Easy to operate, low torque



www.evanscomponents.com

7606 SW Bridgeport Road
Portland, Oregon 97224

Office 971.249.1600

Fax 971.249.1601