

PTC-1



PTC-2

TUBE CUTTERS

Features

- **Heat resistance**
Wide operation range (-196°C~+260°C)
- **Chemical resistance**
Mostly chemicals cannot be attacked
- **Non viscous**
No hygroscopic, No absorption
- **Electrical characteristic**
High insulation resistance, Puncture and dielectric characteristic
- **Particle free**
No elutriations of impurity such as metal ion

Applications

- **Chemical supply**
(semiconductor equipments)
- **Liquid and Gas supply**
(Chemical industry, Medical manufacturing)
- **High viscous Chemical supply**
(Food manufacturing)
- **For Insulation, High dielectric characteristic equipment**
(Electric equipment)

Meteoric size (mm)					
O.D. × I.D.	Thicness	Length	Tolerance		
			O.D.	Thicness	Length
3 × 2	0.5	3m or 20m	±0.10	±0.05	+2% -0
4 × 3	0.5			±0.06	
6 × 4	1.0			±0.10	
8 × 5.6	1.2			±0.06	
8 × 6	1.0		±0.10		
10 × 6.8	1.6		±0.12	±0.06	
10 × 8	1.0		±0.10	±0.06	
12 × 8.8	1.6		±0.10	±0.06	
12 × 10	1.0		±0.10	±0.06	
19 × 15.8	1.6		±0.20	±0.10	
25 × 22	1.5				

Inch size (mm)						
O.D. × I.D.	Thicness	Length	Tolerance			
			O.D.	Thicness	Length	
1/8" × 0.086 (3.18 × 2.18)	0.5	3m or 20m	±0.10	±0.05	+2% -0	
1/4" × 5/32" (6.35 × 3.95)	1.2			±0.10		
1/4" × 0.171" (6.35 × 4.35)	1.0			±0.10		
3/8" × 1/4" (9.53 × 6.33)	1.6			±0.12		±0.10
3/8" × 0.296" (9.53 × 7.53)	1.0		±0.12	±0.10		
1/2" × 3/8" (12.7 × 9.5)	1.6		±0.20	±0.15		
3/4" × 5/8" (19 × 15.8)	1.6		±0.20	±0.15		
1" × 7/8" (25.4 × 22.2)	1.6		±0.20	±0.15		
1-1/4" × 1-1/10" (31.8 × 28.0)	1.9		3m	±0.25		±0.15
1-1/2" × 1-21/64" (38.1 × 33.7)	2.2					

*Other length is also available

PILAFLO[®] SUPER CLEAN TUBE USING NEW PFA

Features of Super Clean Tube using new PFA

- ① A grade of new PFA providing high inner smoothness
- ② Excellent inner smoothness
- ③ High transparency
- ④ Through production in a clean room

General physical properties

Table 1 General physical properties of Super Clean PFA Tube

Physical properties		Unit	Value
Specific gravity		—	2.15
Tensile strength	23°C	MPa	32.6
	23°C		17.8
Yield point	23°C	MPa	15.4
	23°C		5.9
Elongation	23°C	%	358
	23°C		544
Tensile elastic modulus	23°C	MPa	409.2
	23°C		53.6
Flex life		cycle	1500000

Note : The above values for physical properties are not standard ones, but typical ones.

Inner smoothness

Table 2 Measurement result of surface roughness

		Unit	Super Clean	Conventional product A	Conventional product B
Mean roughness along central line	Ra	μm	0.03	0.25	0.18
Max. height	R max	μm	0.58	3.19	1.74

Fig. 1 Measurement result of surface roughness (Ra)


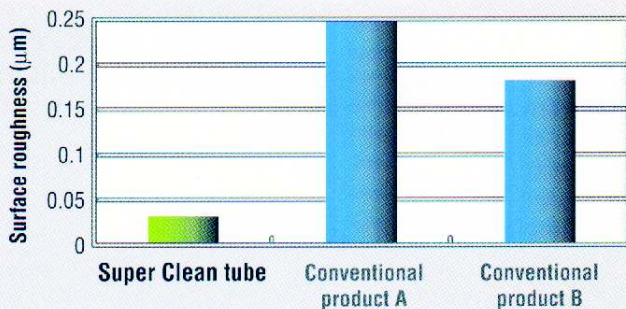


Fig. 2 Measurement result of surface roughness (Rmax)

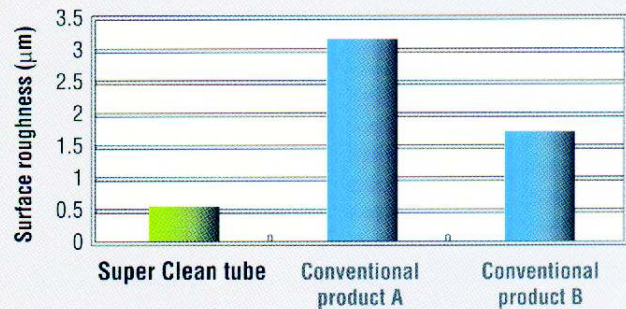

NIPPON PILLAR PACKING CO., LTD.

Head Office : 11-48, Nonakaminami 2 Chome, Yodogawa-ku, Osaka, 532-0022 Japan.
Tel : 81-(0)6-6305-2821 Fax : 81-(0)6-6302-3300
E-mail : info@pillar.co.jp

Tokyo Office : 2-2, Uchisaiwaicho 2 Chome, Chiyoda-ku, Tokyo, 100-0011 Japan.
Tel : 81-(0)3-3508-1611 Fax : 81-(0)3-3508-1881

Nippon Pillar Corporation of America : 1562, Parkway Loop, Suite 2C, Tustin, CA 92780, USA.
Tel : 1-714-258-7741 Fax : 1-714-258-7760
E-mail : sales@nipponpillar.com

Nippon Pillar Singapore Pte, Ltd. : Blk 71 Ayer Rajah Crescent, #06-20/23 Ayer Rajah Industrial Estate Singapore 139951
Tel : (65)6861-7138 Fax : (65)6862-9098
E-mail : npillars@singnet.com.sg

Pillar Taiwan Semiconductor Work Shop : No.15 Lane 42, Ming-Yu 2 Street, Hsin-Chu, Taiwan, R.O.C.
Tel : 886-3-5785715 Fax : 886-3-5785716
E-mail : hornwell@ms9.hinet

Pillar Korea Semiconductor Work Shop : 55-1, Changkoc-1RI, Paltan-Myun, Hwasung-Kun, Kyoungki-Do, Korea.
Tel : 031-353-1521 Fax : 031-353-1522
E-mail : hanjongeng@hotmail.com

<http://www.pillar.co.jp/> e-mail : info@pillar.co.jp

*Specifications and dimensions are subject to change without prior notice.
*The data on this catalogue are solely for your reference and are not to be construed as constituting a warranty.

CAUTION

- Follow the instructions, before installation and operation, for your safety.

CAT. No.310117 0403(K)1